



"Out Shines All Others"

PULSABLE IR SOURCE

Model EP-3962*

Helioworks, Inc. offers a unique steady state infrared emitter with a tungsten filament that provides mid IR radiation to over 5 microns. It operates in pulsed or steady state mode at temperatures in excess of 1900° K in an industry standard TO-8 package.



Key features include:

- Tungsten Filament
- Operates in Pulsed or Steady State Mode
- Internal Gold Plated Parabolic Reflector
- Sapphire Window
- Standard TO-8 Package



Electrical Specifications:

Peak Voltage = 2.6 Volts MAXIMUM

Peak Current = 1.05 Amps


Peak Power = 2.7 Watts

* Patented

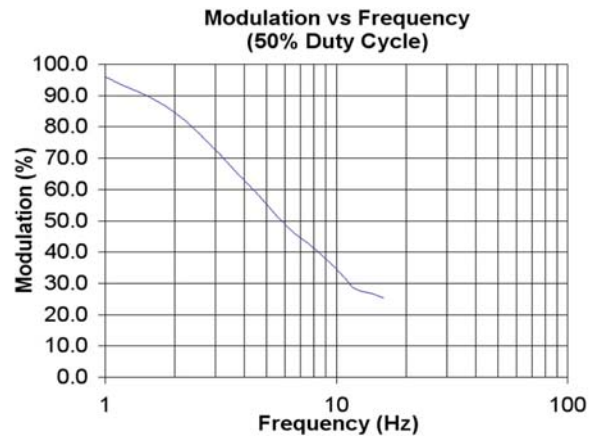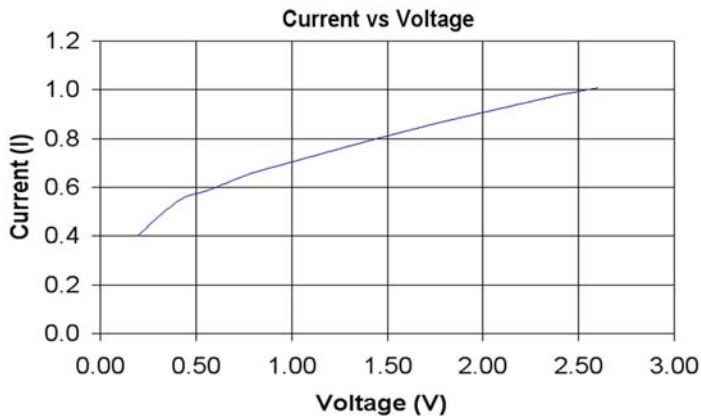

Radiant Intensity (Watts/CM2):

Volts = 2.6, Distance = 3.0 inches from source

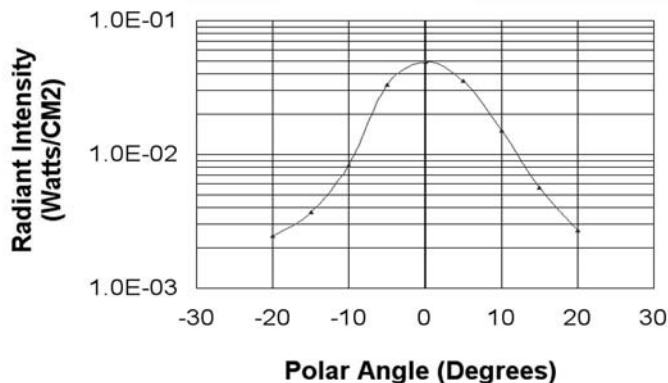

Polar Angle	Average (Watts/CM2)
-20	2.50E-03
-15	3.80E-03
-10	8.00E-03
-5	3.30E-02
0	4.95E-02
5	3.60E-02
10	1.50E-02
15	5.60E-03
20	2.70E-03

Boston Electronics Corporation • 91 Boylston Street, Brookline, MA 02445 USA

Tel: (800) 347-5445 or (617) 566-3821 • Fax: (617) 731-0935

www.boselec.com • boselec@boselec.com