



"Out Shines All Others"

PULSABLE IR SOURCE Model EF-8533





HelioWorks, Inc. offers a unique pulsable infrared emitter with three (3) radiating elements that can be addressed individually (4 lead package), or in total (2 lead package). It can operate in pulsed or steady state mode at a peak temperature of 700°C (973°K) in an industry standard TO-8 package with a Zinc Selenide (ZnSe) window. Specify either 2 lead (EF-8532-2) or 4 lead (EF-8532-4) versions. Photo shows 2 lead version.

Key features include:


- Filament has uniform emitting area
- Emissivity is 0.88
- Zinc Selenide (ZnSe) window
- Operates in pulsed or steady state mode
- Industry standard TO-8 package
- Operates at peak temperature of 700°C (973°K)
- Large temperature change, ΔT , during pulsing

Electrical Specifications:

Peak Voltage = 3.00 Volts DC MAXIMUM
Peak Current = 1.34 Amps
Peak Power = 4.0 Watts

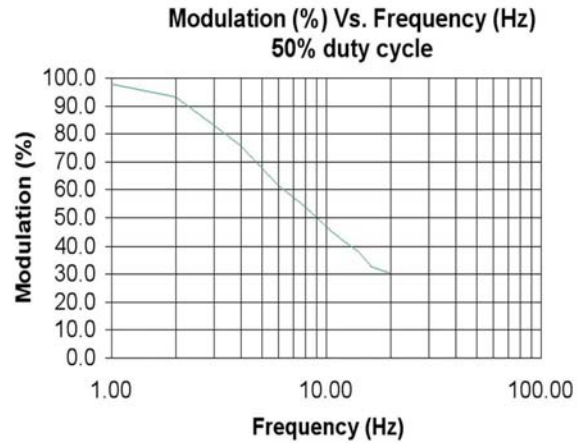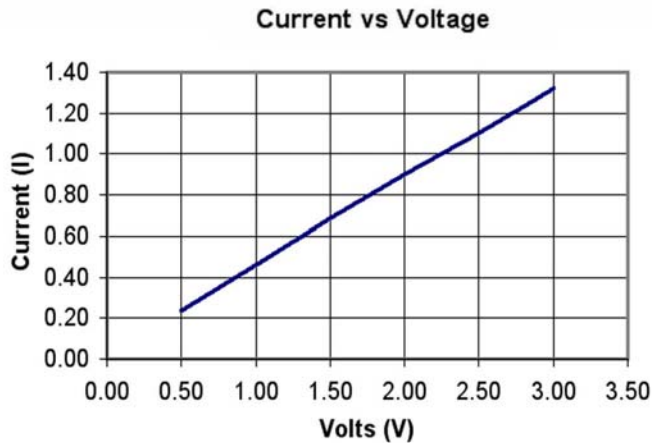

Polar Intensity (V = 3.0, Distance = 2 inches from face)

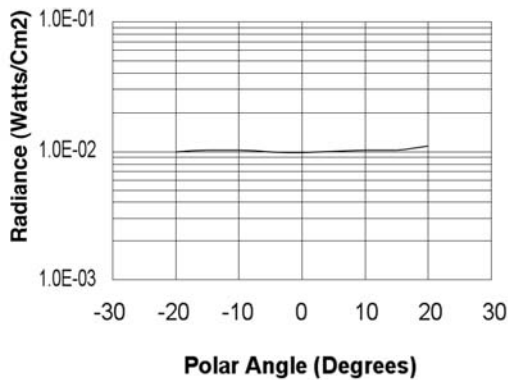

Polar Angle	Average (Watts/Cm2)
-20	1.00E-02
-15	1.03E-02
-10	1.03E-02
-5	1.00E-02
0	9.80E-03
5	1.01E-02
10	1.03E-02
15	1.03E-02
20	1.10E-02

